





AFEX Bearing Equipment Co., Ltd.

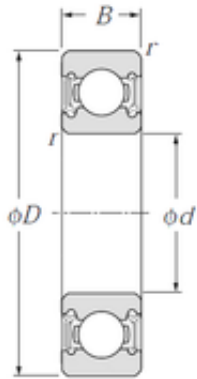

65 mm x 120 mm x 23 mm NTN 6213LLU
 Import Japan Ball Bearings 6213LLUC3/2AS
 rubber ball bearings for motors

Bearing No. 6213LLU

6213LLU Bearing 2D drawings and 3D CAD models

Size	65x120x23 mm
Bore Diameter	65 mm
Outer Diameter	120 mm
Width	23 mm
d	65 mm
D	120 mm
B	23 mm
C	23 mm
r min.	1,5 mm
da min.	73 mm
da max	80,5 mm
Da max.	112 mm
ra max.	1,5 mm
Weight	0,99 Kg
Basic dynamic load rating (C)	57,5 kN
Basic static load rating (C0)	40 kN
Reference speed	3 600 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359004915
Product Group	B00308



AFEX Bearing Equipment Co., Ltd.

Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	65MM Bore; 120MM Outside Diameter; 23MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	2.18
Bore	2.559 Inch 65 Millimeter
Outer Race Width	0.906 Inch 23 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	4.724 Inch 120 Millimeter



AFEX Bearing Equipment Co., Ltd.

bore diameter:	65 mm
precision rating:	ISO Class 0
outside diameter:	120 mm
finish/coating:	Uncoated
overall width:	23 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	23 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	23 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	3600 rpm
internal clearance:	CN
fillet radius:	1.5 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	6500 RPM
dynamic load capacity:	57500 N
series:	62
static load capacity:	40000 N
manufacturer product page:	Click here